


# Ultra X Pro Plus

HALF-CELL N-Type TOPCon BIFACIAL MODULE

TYPE: STPXXXS - D66-Nsh+

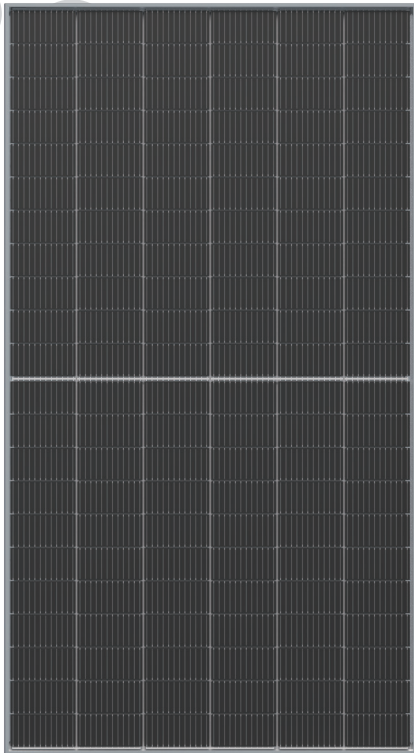

**690-720W**    **23.2%**  
POWER OUTPUT                      MAX EFFICIENCY



### Higher value for customers

effectively reduce system BOS cost, achieve lower LCOE, and improve project profitability



### Compatible with mainstream trackers

the module design is highly compatible with power plant tracking systems, which offers a cost-effective solution for large power plants



### Withstand harsh environments

through the high salt spray LID ammonia resistance test, more adaptable to high temperature, strong wind, ice, snow and salt water corrosion of the climate environment



### Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)




**Tier 1**  
Bloomberg  
NEW ENERGY FINANCE

ISO 14001 Environment Management System  
ISO 45001 Occupational Health and Safety  
ISO 9001 Quality Management System  
SA 8000 Social Responsibility Standards  
IEC TS 62941 Guideline for Module Design

IEC 61701 Salt-mist certification  
IEC 62716 ammonia certification  
IEC 60068-2-68 Dust and Sand  
IEC 61730-2 (UL790) fire class C



**30** years of linear warranty  
**15** years of product warranty

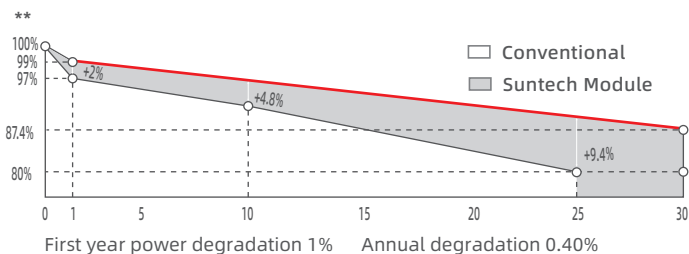

\* Please refer to Suntech Standard Module Installation Manual for details.

\*\* Please refer to Suntech Limited Warranty for details.


\*\*\* WEEE only for EU market.

\*\*\*\* Suntech reserves the right to the final.

# Ultra X Pro Plus STPXXXS - D66-Nsh+ 690-720W

## Mechanical Characteristics

Solar Cell	N-type Monocrystalline silicon 210 mm
No. of Cells	132 (6 × 22)
Dimensions	2384 × 1303 × 35 mm (93.9 × 51.3 × 1.4 inches)
Weight	37.5 kgs (82.7 lbs.)
Front \ Back Glass	2.0±2.0 mm (0.079±0.079inches) semi-tempered glass
Output Cables	4.0 mm <sup>2</sup> , (-) 350 mm and (+) 160 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1500 V DC (IEC)
Connectors	STP-XC4
Maximum Series Fuse Rating	35 A
Power Tolerance	0/+5 W
Refer. Bifaciality Factor	(80 ± 5)%
Frame	Anodized aluminum alloy frame
Packing Configuration	31 Pieces per pallet 558 Pieces per container /40'HC 1325×1120×2510 1196.5kg

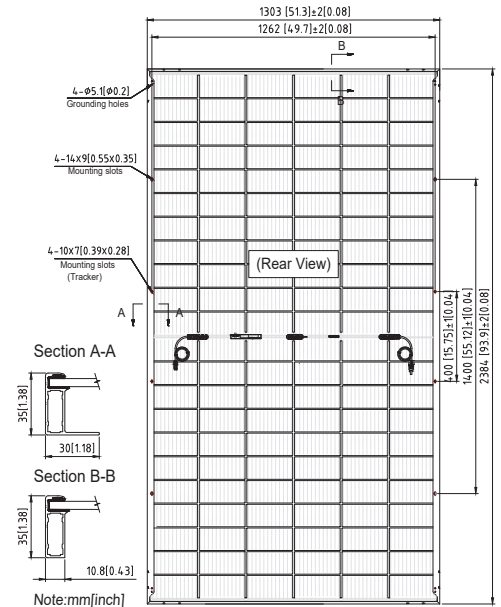

For tracker installation, please turn to Suntech for mechanical load information.

## Electrical Characteristics

Module Type	STP720S-D66-Nsh+		STP715S-D66-Nsh+		STP710S-D66-Nsh+		STP705S-D66-Nsh+		STP700S-D66-Nsh+	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	720	548.3	715	544.7	710	541.6	705	538.9	700	534.3
Optimum Operating Voltage (Vmp/V)	40.45	38.0	40.25	37.9	40.05	37.7	39.85	37.6	39.65	37.3
Optimum Operating Current (Imp/A)	17.81	14.41	17.78	14.40	17.72	14.38	17.69	14.35	17.66	14.32
Open Circuit Voltage (Voc/V)	48.45	46.0	48.25	45.8	48.05	45.6	47.85	45.5	47.65	45.2
Short Circuit Current (Isc/A)	18.83	15.18	18.79	15.15	18.75	15.12	18.71	15.08	18.67	15.05
Module Efficiency (%)	23.2		23.0		22.9		22.7		22.5	

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5; NMOT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, AM=1.5, wind speed 1 m/s; Tolerance of Pmax is within +/- 3%;

## Different Rearside Power Gain Reference to 720W Front


Rearside Power Gain	5%	15%	25%
Maximum Power at STC (Pmax)	756.0	828.0	900.0
Optimum Operating Voltage (Vmp/V)	40.5	40.5	40.6
Optimum Operating Current (Imp/A)	18.70	20.48	22.26
Open Circuit Voltage (Voc/V)	48.5	48.5	48.6
Short Circuit Current (Isc/A)	19.77	21.65	23.54
Module Efficiency (%)	24.3	26.7	29.0

## Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.046%/°C

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

## Graphs Current-Voltage & Power-Voltage (720W)

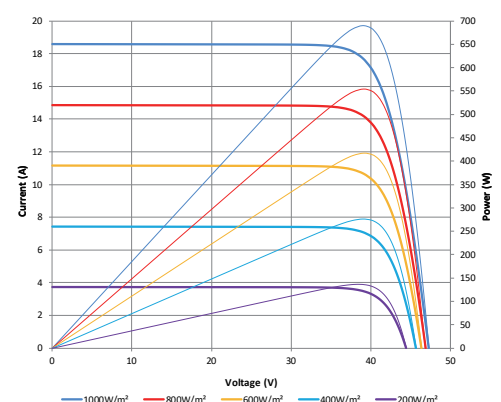

D66-Nsh+ Electrical Characteristics							
Type	Standard	Pow (W)	Vmp	Imp	Voc	Isc	FF
	STC	690	39.25	17.59	47.25	18.59	78.60%
	BNPI	765	/	/	47.51	20.60	/
	aBSI	/	/	/	/	23.05	/
	STC	695	39.45	17.63	47.45	18.63	78.68%
	BNPI	770	/	/	47.71	20.64	/
	aBSI	/	/	/	/	23.10	/
	STC	700	39.65	17.66	47.65	18.67	78.71%
	BNPI	776	/	/	47.91	20.69	/
	aBSI	/	/	/	/	23.15	/
	STC	705	39.85	17.69	47.85	18.71	78.74%
	BNPI	781	/	/	48.11	20.73	/
	aBSI	/	/	/	/	23.20	/
	STC	710	40.05	17.72	48.05	18.75	78.77%
	BNPI	787	/	/	48.31	20.78	/
	aBSI	/	/	/	/	23.25	/
	STC	715	40.25	17.78	48.25	18.79	78.86%
	BNPI	792	/	/	48.51	20.82	/
	BSI	/	/	/	/	23.3	/
	STC	720	40.45	17.81	48.45	18.83	78.92%
	BNPI	798	/	/	48.71	20.86	/
	BSI	/	/	/	/	23.35	/
Bifaciality Factor	N-Type 80%						
Maximum Series Fuse Rating	35A						

本文中所有信息为尚德内部信息，未经书面许可，不得向外提供。

All information in the document belongs to Suntech, any disclosure is forbidden without written permission.